


EUROCUTTER®

d i f f e r e n t , b u t b e t t e r

LOADING

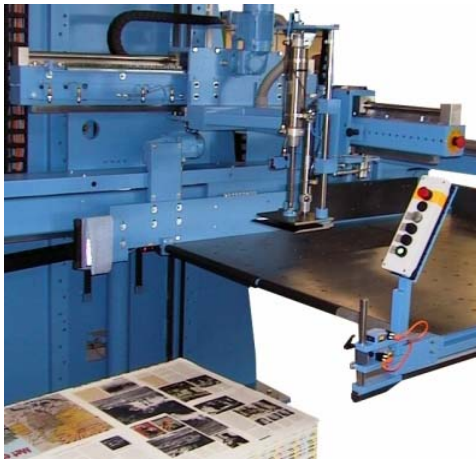

BLA



BLA-DP

LOADING UNIT BLA

Increase of productivity through networking of working processes

EUROCUTTER® Cutting Systems do not only make work easier, but also increase productivity.

Automatic lifting, lowering and automatic loading

Pile lifts and loading units reduce physical labour. The cutting material is lifted quickly and automatically to the optimal working height and transferred to the High Speed Cutter or other peripheral equipment.

Operator bending is eliminated with an enormous increase in productivity.



Characteristic features BLA

Automatic loading of guillotines or diecutters
to the front or rear table

Loading of full pile heights
up to 165 mm adjustable

Feeder Unit
for loading of the guillotine

High productivity
due optimal operator efficiencies

Table surface made of stainless steel (V2A)
with brass airnozzles (long lifetime, almost wear resistant)


Adjustable air blower

Reflection-lightscanner and reflection-wedge
for recognition of the pile

Intermediate table to the guillotine

Fronttable with integrated panel

Different formats
and different pile heights



CE-Norm Safety Standard



Options:

- retractable sidelay for rear table loading
- gripper system DP for loading of 2 palettes in the same time to a diecutter or guillotine
- pressroller unit before further transportation
- adjusting unit for loading of diecutters



EUROCUTTER® BLA		-3-1450	-4-1450	-6-1450	-7b-1450	-6-1700	-7b-1700
Format	mm	750 x 1060	800 x 1200	1050 x 1450	1220 x 1640	1050 x 1450	1220 x 1640
Size	Inch	28 ¼ x 40	31 ½ x 47 ¼	41 ¼ x 57	48 x 64 ½	41 ¼ x 57	48 x 64 ½
Lagenhöhe max.	mm	165	165	165	165	165	165
Layer height	Inch	6 ½	6 ½	6 ½	6 ½	6 ½	6 ½
Hubhöhe min./max.	mm	100 / 1450	100 / 1450	100 / 1450	100 / 1450	100 / 1700	100 / 1700
Pile height	Inch	4 / 57	4 / 57	4 / 57	4 / 57	4 / 67	4 / 67
Tragkraft max.	Kg	250	250	250	250	250	250
Transport power	lbs	551	551	551	551	551	551
Elekt. Leistung	Kw	1,75 / 1,9	1,75 / 1,9	1,75 / 1,9	1,75 / 1,9	1,75 / 1,9	1,75 / 1,9
Electrical power	HP	2,5	2,5	2,5	2,5	2,5	2,5
Gebälse	l /	1200	1200	1200	1200	1200	1200
Blower	min	42	42	42	42	42	42
Luftverbrauch	l /	20	20	20	20	20	20
Air consumption	min	0,7	0,7	0,7	0,7	0,7	0,7
Spannung	V	230 – 400	230 – 400	230 – 400	230 – 400	230 – 400	230 – 400
Voltage	cycle	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60

Specifications are subject to change without notice



MZE Maschinenbau GmbH & Co. KG
 Siemensstr. 21
 D-65779 Kelkheim / Germany
 Telefon +49 6195 994210
 Fax +49 6195 994240
 Email info@eurocutter.de
 Internet http://www.eurocutter.de